
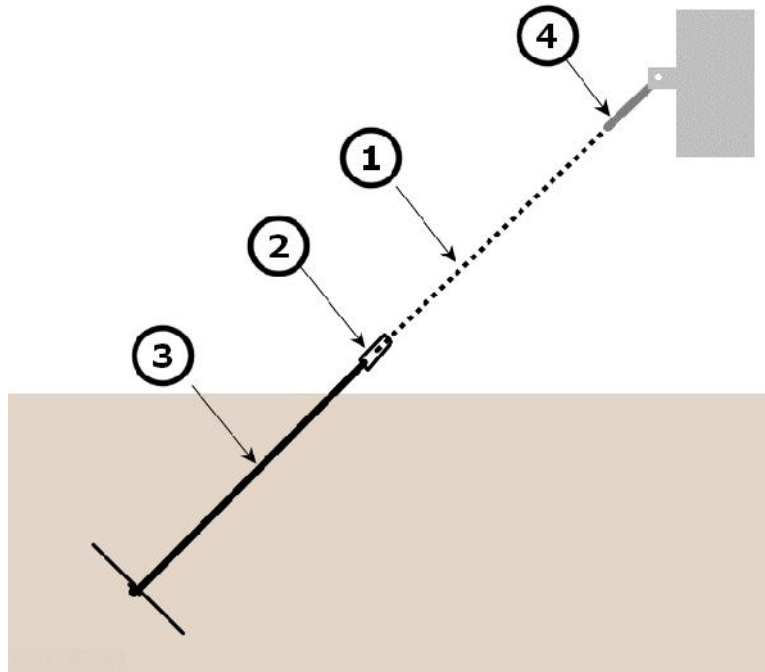


69KV2ST01

Guy property: M24 Stay Rod and guy assy



①	Stay Wire	Requirement	Offer
			
	Description	M24 Stay Rod and guy assy	
	Cable Type	1770MPa steel grade HSS stranded steel Steel Galv	
	Steel Stranding	1/19	
	Unit Weight (kg/m)	1.75	
	Diameter (mm)	19	
	Cross sectional area (mm ²)	211	
	Minimum breaking load (kN)	336	
	Safe Working load (kN)	70% of 336 = 235kN	
②	Adjustable Cable Grip	Requirement	Offer
			
	Description	Adjustable Cable grip, linking Stay rod assembly to guy cable	
	Type	Adjustable connex wedge type	
	Minimum breaking load (kN)	>336	
	Safe Working load (kN)	>70% of 336 = 235kN	

③	Stay Rod assembly	Requirement	Offer
			
	Description	M24 Stay rod assembly, with base plat to match soil type.	
	Minimum breaking load (kN)	>336	
	Safe Working load (kN)	>70% of 336 = 235kN	

④	Pole top connection	Requirement	Offer
			
	Description	Swage Lock type tongue or clevis to suit pole attachment bracket	
	Minimum breaking load (kN)	>336	
	Safe Working load (kN)	>70% of 336 = 235kN	